



Documentation for Bulk Uploader

Table of Contents

Table of Contents	2
Bulk Uploader	3
License	3
Encryption Tool 3.x compatibility	3
Download	3
Requirements	4
User guide v3.x	5
Server configuration	5
Bulk upload files and folders	6
Log	6
Change log for v3.x	7
Bulk Uploader 3.x	7
v3.0	7
Language pack	8
Spanish translation	8
Create a new language	10
=	10

Bulk Uploader

BulkUploader is an application for windows that allows you to upload documents in bulk.

License



BulkUploader for WINDOWS is licensed under the terms of the [EULA - OpenKM End User License Agreement](#) as published by OpenKM Knowledge Management System S.L.

This program is distributed WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the [EULA - OpenKM End User License Agreement](#) for more details.

Encryption Tool 3.x compatibility

Encryption tool version	OpenKM Compatibility		Status
	Professional	Community	
3.0	Version 7.1.30 and upper.	Not compatible.	Active.

Download

- OpenKM Bulk Uploader 3.0 is available at OpenKM [Download center](#).


Requirements

Before running the application be sure you get installed Visual C++ Redistributable for Visual Studio.

- Windows installer 4.5.
- .NET Framework 4.6.1 ([x86 or x64](#)).
- Visual C++ Redistributable for Visual Studio 2012 ([x86 or x64](#)) (Recommended).

User guide v3.x

BulkUploader is an application for Windows that allows you to upload lots of documents in a easy way.

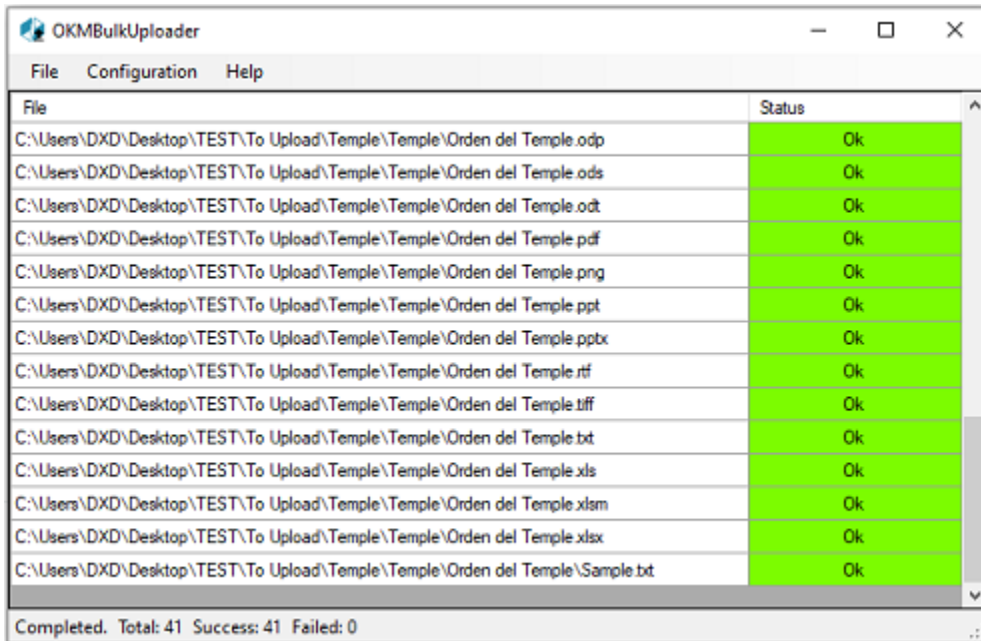

Server configuration

Choose **File / Configuration** menu option to show the configuration popup.

The available configuration parameters are:

Property	Type	Description
Language	Select	User interface language.
User	String	User id for accessing OpenKM. <input type="text" value="user1"/>
Password	String	The password of the user. <input type="text" value="pass1"/>
Host	String	OpenKM URL. <input type="text" value="http://localhost:8080/openkm/"/>

To accept configuration parameters changes, click **Accept** button.

Bulk upload files and folders

1. You can select a folder from the **File -> Upload option** or select one or more folders or documents and **drag and drop** them on the main application window.
2. Then you must select the destination path and all the files and folders will be uploaded, indicating the status of each one.

Log

In **My Documents/OpenKM** there's a file log called **OKMBulkUploader.log** with a complete log trace.

Change log for v3.x

Bulk Uploader 3.x

v3.0

- Released 2022-02-25
- Initial release

Language pack

The application can work with several languages, there are set the languages terms definitions.



Sometimes translations are not fully completed and some terms are missing. The "en-GB" is used to identify which are the missing terms and how many are.

When a term is missing in other languages the "en-GB" term is used in its place.



en-GB translation cannot be removed.

Spanish translation

```
# Main menu
mainmenu.file=Fichero
mainmenu.configuration=Configuración
mainmenu.exit=Salir
mainmenu.help=Ayuda
mainmenu.about=Acerca de...
mainmenu.configuration.server=Configurar servidor
mainmenu.help.documentation=Documentación en linea
mainmenu.help.logfile=Abrir archivo log
mainmenu.upload=Subir

# Buttons
button.accept=Aceptar
button.cancel=Cancelar
button.close=Cerrar
button.search=Buscar
button.refresh=Refrescar
button.crop=Recortar
button.restore=Restaurar
button.save=Guardar
button.skip=Omitir
button.next=Siguiete
button.rename=Renombrar
button.add=Añadir

# Application forms
form.main.title=OKMBulkUploader
form.about.title=Acerca de

# Application messages
message.alert.message=En proceso, por favor espere...
message.change.existing.document= ¿ El documento {0} ya existe, desea actualizarlo ?
message.convert.pdf.select.pages=El número de páginas debe ser mayor a "0".
message.convert.pdf.select.range=Rango inválido.
message.convert.pdf.select.percentage=Seleccione un porcentaje para la compresión Gro
message.exists.folder=La ruta de destino no existe.
message.alert.invalid.characters=El nombre del archivo no puede contener los siguientes
message.scanner.profile.exists=Ya existe un perfil con el nombre "{0}".
message.scanner.profile.remove=¿Está seguro de eliminar el perfil "{0}"?.
message.image.delete=¿Está seguro de eliminar esta imagen?.
message.image.restore=¿Está seguro de restaurar esta imagen?.
message.scanner.continue=¿Continuar escaneando con el perfil: {0}?.
message.pdf.delete=¿Está seguro de eliminar este PDF?.
message.exit.app=¿Desea salir de la aplicación?
```



```
message.profile.config.upload.path.select=Debe seleccionar una ruta para subir.
message.profile.config.metadata.group.select=Debe seleccionar al menos un grupo de
message.profile.config.scan.range.brightness.invalid=El valor del brillo debe estar e
message.profile.config.scan.range.contrasts.invalid=El valor del contraste debe estar
message.profile.config.scan.device.select=Seleccione un dispositivo.
message.profile.config.name=Debe escribir un nombre para el perfil.
message.profile.config.encrypt.password=Las contraseñas para encriptar el archivo deb
message.step.rename.file.exists=Ya existe un archivo con ese nombre.
message.profile.config.pdf.example.range=Escriba números de página e intervalos separ
message.connection.error=Error de conexión con el servidor.
message.viewform.crop.invalid.area=Área seleccionada inválida.
message.required=Obligatorio
message.required.field=Faltan llenar campos.
message.app.requirements.adobe=Para un correcto funcionamiento se requiere instalar A
message.process.rename.finalize=El proceso para cambiar nombres ha terminado.
message.process.metadata.finalize=El proceso para añadir metadatos ha terminado.
message.process.uploading=Subiendo...
message.process.upload.finish=Proceso terminado.
message.successful=Correcto
message.process.encryption.finish=Proceso de encriptación terminado.

# Form configuration
form.configuration.name=Configuración del servidor
form.configuration.language=Idioma
form.configuration.version=Versión de OpenKM
form.configuration.userName=Usuario
form.configuration.password=Clave
form.configuration.host=Host
form.configuration.error.msg=El campo {0} no puede ser vacío
form.configuration.button.accept=Aceptar
form.configuration.button.cancel=Cancelar
form.configuration.button.test=Prueba
form.configuration.test.ok=Conexión establecida
form.configuration.test.error=La prueba de conexión ha fallado!!!
form.configuration.connection.error=La conexión ha fallado!!!
form.configuration.label.addMetadata=Añadir grupo de metadatos
form.statusbar.message.connecting=Conectando...
form.statusbar.message.test.connection=Probando conexión...

# Form tree
form.tree.title=Navegador
form.tree.context.root=Taxonomía
form.tree.context.templates=Plantillas
form.tree.context.personal=Personal
form.tree.contextmenu.newfolder=Nueva carpeta
form.tree.contextmenu.renamefolder=Renombrar carpeta
form.tree.contextmenu.deletefolder=Eliminar carpeta
form.tree.button.accept=Seleccionar
form.tree.button.select=Seleccionar
form.tree.input.title=Gestión de carpetas
form.tree.button.refresh=Refrescar
form.tree.button.search=Buscar
form.tree.button.cancel=Cancelar
form.tree.msg.foldername.empty=Error, el nombre de la carpeta está vacío
form.tree.disable.tree.view=Desactivar la vista de árbol
form.tree.label.selected.node=Nodo seleccionado:

# Form search
form.search.title=Buscar
form.search.msg.min.char=Como mínimo debe escribir 3 caracteres
form.search.msg.empty=La consulta no ha devuelto ningún resultado
form.search.button.search=Buscar
form.search.button.cancel=Cancelar

# Main form
main.form.mainDataGridview.column.file=Fichero
main.form.mainDataGridview.column.status=Estado
```

```
main.form.mainDataGridView.status.uploading=Subiendo...
main.form.mainDataGridView.status.ok=Ok
main.form.mainDataGridView.status.error=Error
main.form.statusStrip.status.uploading=Subiendo...
main.form.statusStrip.status.completed=Terminado.
main.form.statusStrip.status.total=Total: {0}
main.form.statusStrip.status.success=Exitosos: {0}
main.form.statusStrip.status.error=Errores: {0}

# Add metadata form
form.selectMetadata.caption=Añadir grupo de metadatos
form.selectMetadata.button.add=Añadir
form.selectMetadata.button.cancel=Cancelar
form.selectMetadata.button.finish=Finalizar
form.selectMetadata.add.message=Grupo "{0}" se agregó correctamente.
form.metadata.validator.required=Campo vacío.
form.metadata.validator.alphabetic=El campo no es alfabético[^a-zA-Z]
form.metadata.validator.decimal=El campo no es decimal [0-9{1}]
form.metadata.validator.numeric=El campo no es un número [0-9]
form.metadata.validator.email=El campo no es un correo válido
form.metadata.validator.url=El campo no es una url válida
form.metadata.validator.maxlength=El campo supera la longitud máxima <={0}
form.metadata.validator.minlength=El campo no tiene la longitud mínima >={0}
form.metadata.validator.lessthan=El campo debe ser menor que {0}
form.metadata.validator.greaterthen=El campo debe ser mayor que {0}
form.metadata.validator.minimun=El campo requiere un valor mínimo >={0}
form.metadata.validator.maximun=El campo requiere un valor máximo <={0}
form.metadata.validator.regexp=El campo no coincide con el patrón {0}

# Explorer form
form.explorer.form.name=Editar documentos
form.explorer.context.taxonomia=Taxonomia
form.explorer.context.plantilla=Plantillas
form.explorer.context.usuario=Personal
form.explorer.button.edit=Editar
form.explorer.button.select=Seleccionar
form.explorer.button.searchFolder=Buscar carpeta
form.explorer.button.searchDoc=Buscar documento
form.explorer.button.searchMail=Buscar mail
form.explorer.button.searchrecord=Buscar registro
form.explorer.button.exit=Salir
form.explorer.button.sign=Firmar
form.explorer.dataGrid.column.name=Nombre
form.explorer.dataGrid.column.author=Autor
form.explorer.dataGrid.column.version=Version
form.explorer.dataGrid.column.date=Fecha
form.explorer.dataGrid.column.size=Tamaño
form.explorer.dataGrid.column.from=De
form.explorer.tooltip.encrypted=Encriptado
form.explorer.tooltip.signed=Firmado electrónicamente
form.explorer.tooltip.lock=Bloquear
form.explorer.tooltip.edit=Editar

# Upload form
form.upload.message=Seleccione una ruta para subir
```

Create a new language

Language translations are displayed with the following structure.

Key property

=

Translation value

To **create** a file with a new **language**, follow these steps:

1. Creates a new text document named **OKMBulkUploader-xxXX** with the **.properties** extension, where **xxXX** refers to the **language identifier** (ISO 639).

For example in the case of the Spanish language, it would be esES (in English is enGB), that means the file must be named **OKMBulkUploader-esES.properties**.



More information about [ISO 639](#).

2. Copy into the file created the example of the top of the Spanish translation. Each line of text it has sections, the "**Key property**" and "**Translation value**". The first one should not be changed and the second it refers to translated text and is what you should change.

For example:

```
# Configuration form
form.configuration.name=Configuration
form.configuration.language=Language
form.configuration.version=OpenKM Version
...
```

Replace by:

```
# Configuration form
form.configuration.name=Configuración
form.configuration.language=Idioma
form.configuration.version=OpenKM Versión
...
```

3. Save the file into **the installation folder**, located in: "C:\Program Files (x86)\OpenKM\OKMBulkUploader\" or the path you selected for installation.