



Documentation for SDK for .NET 1.1.0

## Table of Contents

Table of Contents	2
SDK for .NET 1.1.0	5
License	5
Compatibility	5
Download	5
Requirements	6
Visual studio project configuration	6
Sample client	9
Basic concepts	10
Authentication	10
Accessing API	11
Class Hierarchy	13
Auth samples	15
Basics	15
Methods	15
getGrantedRoles	15
getGrantedUsers	16
getMail	17
getName	17
getRoles	18
getRolesByUser	19
getUsers	19
getUsersByRole	20
revokeRole	21
revokeUser	22
grantRole	23
grantUser	24
Document samples	25
Basics	25
Methods	25
createDocumentSimple	25
deleteDocument	26
getDocumentProperties	26
getContent	27
getContentByVersion	28
getDocumentChildren	29
renameDocument	30
setProperties	30
checkout	31
cancelCheckout	32
forceCancelCheckout	33
isCheckedOut	34
checkin	34
getDocumentVersionHistory	35
lock	36
unlock	37
forceUnlock	38
isLocked	38
getLockInfo	39
purgeDocument	40
moveDocument	40
copyDocument	41
restoreVersion	42
purgeVersionHistory	43
getVersionHistorySize	44
isLocked	44
getDocumentPath	45

<b>Folder samples</b>	<b>47</b>
<b>Basics</b>	<b>47</b>
<b>Methods</b>	<b>47</b>
createFolder	47
createFolderSimple	48
getFolderProperties	48
deleteFolder	49
renameFolder	50
moveFolder	50
getFolderChildren	51
isValidFolder	52
getFolderPath	53
<b>Note samples</b>	<b>54</b>
<b>Basics</b>	<b>54</b>
<b>Methods</b>	<b>54</b>
addNote	54
getNote	55
deleteNote	55
setNote	56
listNotes	57
<b>Property samples</b>	<b>59</b>
<b>Basics</b>	<b>59</b>
<b>Methods</b>	<b>59</b>
addCategory	59
removeCategory	60
addKeyword	60
removeKeyword	61
setEncryption	62
unsetEncryption	63
setSigned	64
<b>PropertyGroup samples</b>	<b>65</b>
<b>Basics</b>	<b>65</b>
<b>Methods</b>	<b>65</b>
addGroup	65
removeGroup	66
getGroups	67
getAllGroups	68
getPropertyGroupProperties	68
getPropertyGroupForm	69
setPropertyGroupProperties	70
setPropertyGroupPropertiesSimple	72
hasGroup	73
<b>Repository samples</b>	<b>75</b>
<b>Methods</b>	<b>75</b>
getRootFolder	75
getTrashFolder	75
getTemplatesFolder	76
getPersonalFolder	77
getMailFolder	78
getThesaurusFolder	78
getCategoriesFolder	79
purgeTrash	80
getUpdateMessage	81
getRepositoryUuid	81
hasNode	82
getNodePath	83
getNodeUuid	84
getAppVersion	84
<b>Search samples</b>	<b>86</b>
<b>Basics</b>	<b>86</b>
<b>Methods</b>	<b>89</b>
findByContent	89
findByName	89

---

findByKeywords	90
find	91
findPaginated	92
findSimpleQueryPaginated	93
findMoreLikeThis	95
getKeywordMap	96
getCategorizedDocuments	97

## SDK for .NET 1.1.0

OpenKM SDK for .NET is a set of software development tools that allows for the creation of applications for OpenKM. The OpenKM SDK for .NET include a Webservices library.

This Webservices library is a complete API layer to access OpenKM through REST Webservices and provides complete compatibility between OpenKM REST Webservices versions minimizing the changes in your code.

### License



**SDK for .NET is licensed under the terms of the [EULA - OpenKM SDK End User License Agreement](#) as published by OpenKM Knowledge Management System S.L.**

This program is distributed WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the [EULA - OpenKM SDK End User License Agreement](#) for more details.

### Compatibility



**SDK for .NET version 1.1.0 should be used:**

- From OpenKM Professional version 6.2.19 to 6.2.28.
- From OpenKM Community version 6.3.0 and upper.

### Download

Download the [OKMRest-1.1.0.zip](#) file.

## Requirements


SDK for .NET needs RestSharp.dll library version v104.4.0.0.




More information about RestSharp at <http://restsharp.org/>.

### Visual studio project configuration


- Download the "RestSharp.dll" from [here](#).
- Right click on "References" and in contextual menu choose "add reference".

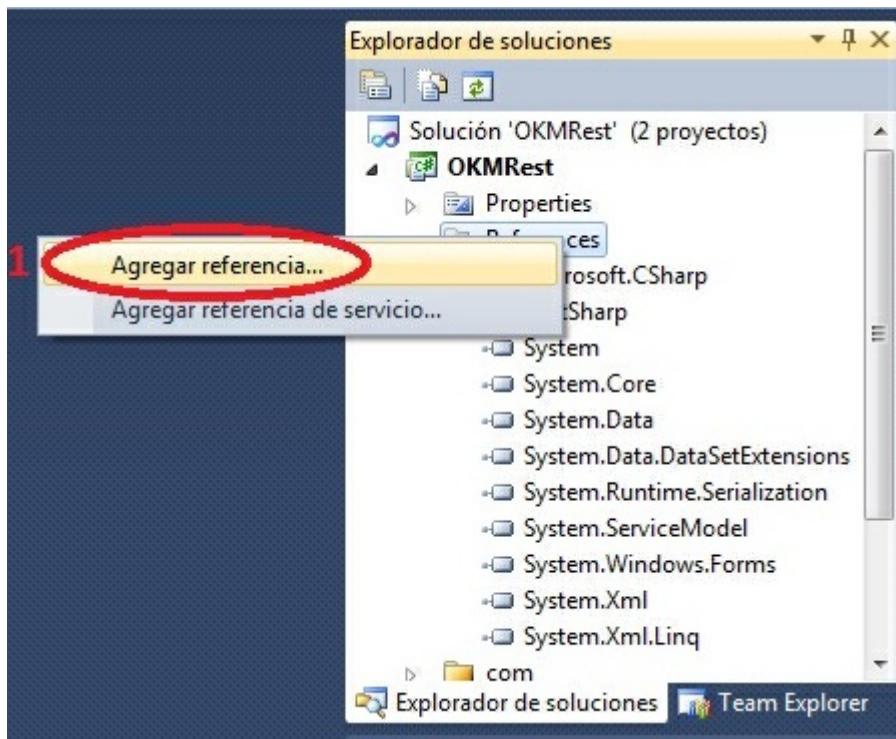

- Choose the "RestSharp.dll" from your file system.

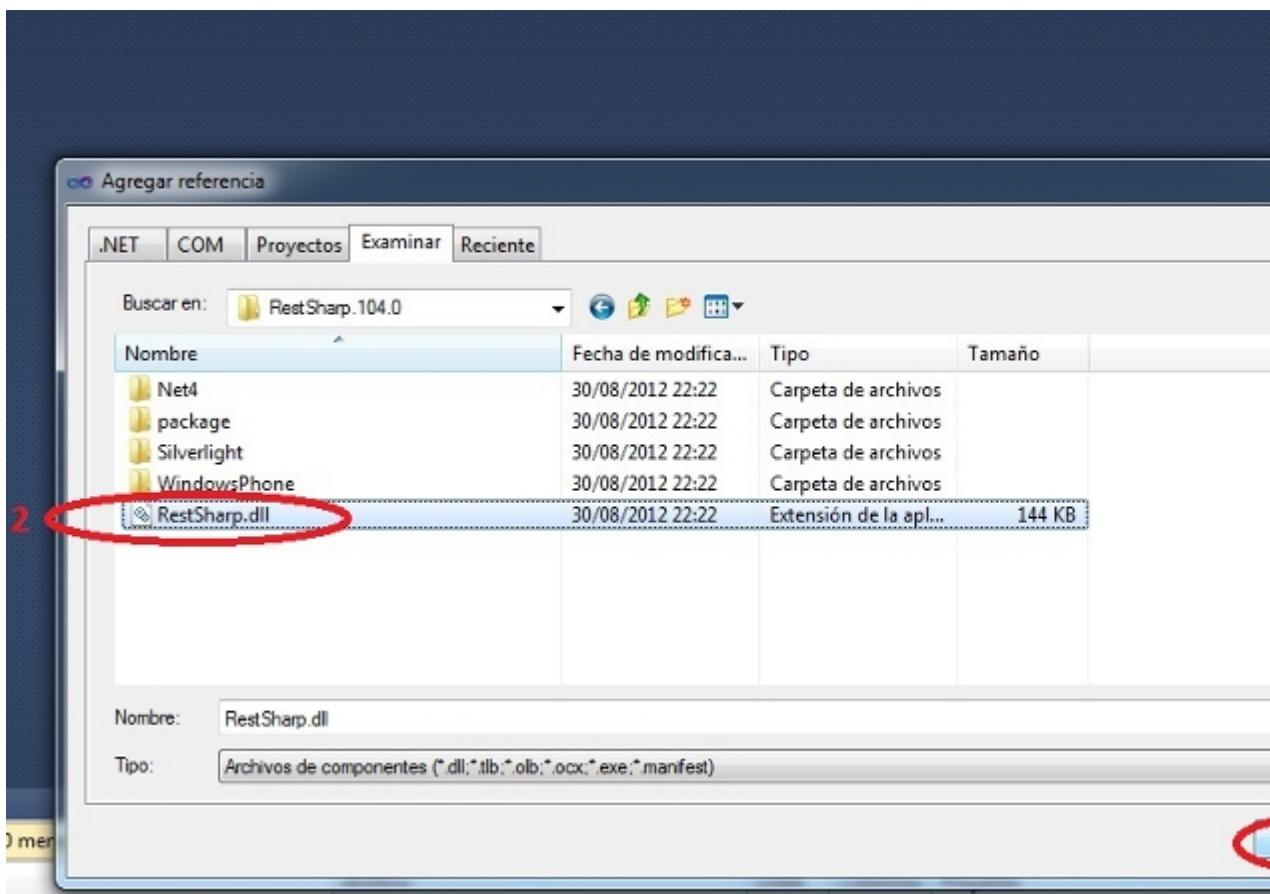

- Click on "Accept" button.

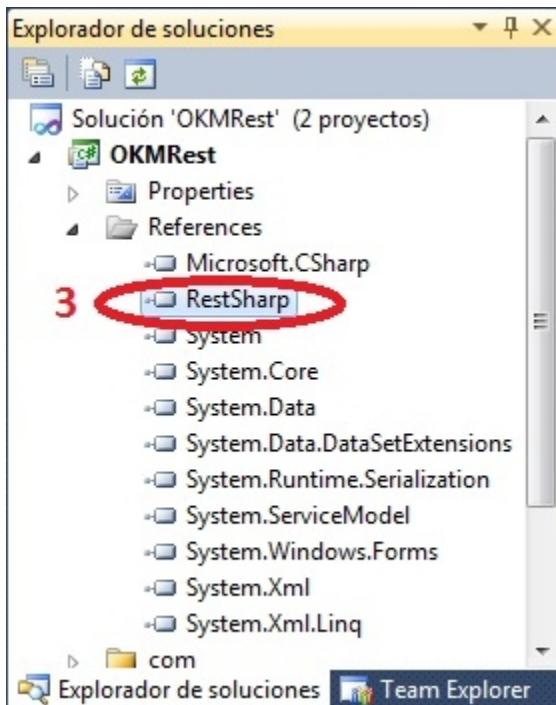

The dll library is yet configured in your .NET project.

## Sample client

Your first class:

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;
using com.openkm.sdk4csharp.bean;

namespace OKMRest
{
    class Program
    {
        /**
         * Sample OpenKM SDK client
         */
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, password);

            try
            {
                foreach(Folder fld in ws.getFolderChildren("/okm:root"))
                {
                    System.Console.WriteLine("Folder -> " + fld.path);
                }
            }
            catch (Exception e)
            {
                System.Console.WriteLine(e.ToString());
            }

            System.Console.ReadKey();
        }
    }
}
```

## Basic concepts

### Authentication

The first lines in your .NET code should be used to create the Webservices object.

We suggest using this method:

```
OKMWebservices ws = OKMWebservicesFactory.newInstance(host, username, password);
```

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;
using com.openkm.sdk4csharp.exception;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, password);

            try {
                System.Console.WriteLine(ws.getAppVersion().getVersion());
            } catch (RepositoryException e) {
                System.Console.WriteLine(e.ToString());
            } catch (DatabaseException e) {
                System.Console.WriteLine(e.ToString());
            } catch (UnknownException e) {
                System.Console.WriteLine(e.ToString());
            } catch (WebServiceException e) {
                System.Console.WriteLine(e.ToString());
            }

            System.Console.ReadKey();
        }
    }
}
```

Also is possible doing the same from each API class implementation.



We do not suggest this way.

For example with this method:

```
RepositoryImpl repositoryImpl = new RepositoryImpl(host, username, password);
```

```
using System;
using System.Collections.Generic;
```

```

using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;
using com.openkm.sdk4csharp.exception;
using com.openkm.sdk4csharp.impl;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            RepositoryImpl repositoryImpl = new RepositoryImpl(host, username, password);

            try {
                System.Console.WriteLine(repositoryImpl.getAppVersion().getVersion());
            } catch (RepositoryException e) {
                System.Console.WriteLine(e.ToString());
            } catch (DatabaseException e) {
                System.Console.WriteLine(e.ToString());
            } catch (UnknownException e) {
                System.Console.WriteLine(e.ToString());
            } catch (WebserviceException e) {
                System.Console.WriteLine(e.ToString());
            }
        }

        System.Console.ReadKey();
    }
}

```

## Accessing API

OpenKM API classes are under com.openkm package, as can be shown at this [javadoc API summary](#).



At main url <http://docs.openkm.com/apidoc/> you'll see all available javadoc documentation.

At the moment of writing this page the actual OpenKM version was 6.3.0 what can change over time.



There is a direct correspondence between the classes and methods into, implemented at com.openkm.api packages and available from SDK for .NET.

OpenKM API classes:

OpenKM API class	Description	Supported	Implementation	Interface
<b>OKMAuth</b>	Manage security and users. For example adds or removes grants on a node, creates or modifies users or getting the profiles.	Yes	AuthImpl.cs	BaseAuth.cs

<b>OKMBookmark</b>	Manages the user bookmarks.	No		
<b>OKMDashboard</b>	Manages all data shown at dashboard.	No		
<b>OKMDocument</b>	Manages documents. For example creates, moves or deletes a document.	Yes	DocumentImpl.cs	BaseDocument.cs
<b>OKMFolder</b>	Manages folders. For example creates, moves or deletes a folder.	Yes	FolderImpl.cs	BaseFolder.cs
<b>OKMMail</b>	Manages mails. For example creates, moves or deletes mails.	No	MailImpl.cs	BaseMail.cs
<b>OKMNote</b>	Manages notes on any node type. For example creates, edits or deletes a note on a document, folder, mail or record.	Yes	NoteImpl.cs	BaseNote.cs
<b>OKMNotification</b>	Manages notifications. For example adds or removes subscriptions on a document or a folder.	No		
<b>OKMProperty</b>	Manages categories and keywords. For example adds or removes keywords on a document, folder, mail	Yes	PropertyImpl.cs	BaseProperty.cs

	or record.			
<b>OKMPropertyGroup</b>	Manage metadata. For example add metadata group, set metadata fields.	Yes	PropertyGroupImpl.cs	BasePropertyGroup.cs
<b>OKMRepository</b>	A lot of stuff related with repository. For example get the properties of main root node ( /okm:root ).	Yes	RepositoryImpl.cs	BaseRepository.cs
<b>OKMSearch</b>	Manages the search feature. For example manages saved queries or perform a new query to the repository.	Yes	SearchImpl.cs	BaseSearch.cs
<b>OKMStats</b>	General stats of the repository.	No		
<b>OKMUserConfig</b>	Manage user home configuration.	No		

## Class Hierarchy

Packages detail:

Name	Description
<b>com.openkm.sdk4csharp</b>	The <b>com.openkm.OKMWebservicesFactory</b> that returns an <b>com.openkm.OKMWebservices</b> object which implements all interfaces.  <pre>OKMWebservices ws = OKMWebservicesFactory.newInstance(host, username, password);</pre>
<b>com.openkm.sdk4csharp.bean</b>	Contains all classes result of unmarshalling REST objects.

<b>com.openkm.sdk4csharp.definition</b>	All interface classes: <ul style="list-style-type: none"><li>• com.openkm.sdk4csharp.definition.BaseAuth</li><li>• com.openkm.sdk4csharp.definition.BaseDocument</li><li>• com.openkm.sdk4csharp.definition.BaseFolder</li><li>• com.openkm.sdk4csharp.definition.BaseNote</li><li>• com.openkm.sdk4csharp.definition.BaseProperty</li><li>• com.openkm.sdk4csharp.definition.BasePropertyGroup</li><li>• com.openkm.sdk4csharp.definition.BaseRepository</li><li>• com.openkm.sdk4csharp.definition.BaseSearch</li></ul>
<b>com.openkm.sdk4csharp.impl</b>	All interface implementation classes: <ul style="list-style-type: none"><li>• com.openkm.sdk4csharp.impl.AuthImpl</li><li>• com.openkm.sdk4csharp.impl.DocumentImpl</li><li>• com.openkm.sdk4csharp.impl.FolderImpl</li><li>• com.openkm.sdk4csharp.impl.NoteImpl</li><li>• com.openkm.sdk4csharp.impl.PropertyGroupImpl</li><li>• com.openkm.sdk4csharp.impl.PropertyImpl</li><li>• com.openkm.sdk4csharp.impl.RepositoryImpl</li><li>• com.openkm.sdk4csharp.impl.SearchImpl</li></ul>
<b>com.openkm.sdk4csharp.util</b>	A couple of utilities. <div style="border: 1px dashed #ccc; padding: 10px; margin-top: 10px;"><p> The class com.openkm.sdk4csharp.util.ISO8601 should be used to set and parse metadata date fields.</p></div>
<b>com.openkm.sdk4csharp.exception</b>	All exception classes.

## Auth samples

### Basics

The class **com.openkm.sdk4csharp.bean.Permission** contains permission values ( READ, WRITE, etc. ). You should use it in combination with methods that are changing or getting security grants.



To set READ and WRITE access you should do:

```
int permission = Permission.READ + Permission.WRITE;
```

To check if you have permission access you should do:

```
// permission is a valid integer value
if ((permission | Permission.WRITE) == Permission.WRITE) {
    // Has WRITE grants.
}
```

On almost methods you'll see parameter named "**nodeId**". The value of this parameter can be some valid node **UUID** ( folder, document, mail, record ) or node **path**.



Example of nodeId:

- Using UUID -> "**c41f9ea0-0d6c-45da-bae4-d72b66f42d0f**";
- Using path -> "**/okm:root/sample.pdf**"

### Methods

#### getGrantedRoles

Description:

Method	Return values	Description
<b>getGrantedRoles(String nodeId)</b>	<b>Dictionary&lt;String, int&gt;</b>	Returns the granted roles of a node.

Example:

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;
```

```

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, password);

            try
            {
                Dictionary<String, int> grants = ws.getGrantedRoles("/okm:root");
                foreach (String role in grants.Keys)
                {
                    System.Console.WriteLine("role ->" + role);
                }
            }
            catch (Exception e)
            {
                System.Console.WriteLine(e.ToString());
            }
        }
    }
}

```

### **getGrantedUsers**

Description:

Method	Return values	Description
<b>getGrantedUsers(String nodeId)</b>	<b>Dictionary&lt;String, int&gt;</b>	Returns the granted users of a node.

Example:

```

using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, password);

            try
            {
                Dictionary<String, int> grants = ws.getGrantedUsers("/okm:root");
                foreach (KeyValuePair<string, int> kvp in grants)
                {

```

```
        Console.WriteLine("{0} -> {1}", kvp.Key, kvp.Value);
    }
}
catch (Exception e)
{
    System.Console.WriteLine(e.ToString());
}
}
```

### getMail

#### Description:

Method	Return values	Description
<b>getMail(String user)</b>	<b>String</b>	Returns the mail of a valid user.

Example:

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, pass);

            try
            {
                System.Console.WriteLine(ws.getMail("okmAdmin"));
            } catch (Exception e) {
                System.Console.WriteLine(e.ToString());
            }
        }
    }
}
```

## getName

### Description:

Method	Return values	Description
<b>getName(String user)</b>	<b>String</b>	Returns the name of a valid user.

Example:

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, pass);

            try
            {
                System.Console.WriteLine(ws.getName("okmAdmin"));
            } catch (Exception e)
            {
                System.Console.WriteLine(e.ToString());
            }
            System.Console.ReadKey();
        }
    }
}
```

## getRoles

Description:

Method	Return values	Description
<b>getRoles()</b>	<b>List&lt;String&gt;</b>	Returns the list of all the roles.

Example:

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, pass);

            try
            {
                System.Console.WriteLine(ws.getRoles().size());
            } catch (Exception e)
            {
                System.Console.WriteLine(e.ToString());
            }
            System.Console.ReadKey();
        }
    }
}
```

```

        try
        {
            foreach (String role in ws.getRoles())
            {
                System.Console.WriteLine(role);
            }
        } catch (Exception e) {
            System.Console.WriteLine(e.ToString());
        }
    }
}

```

## getRolesByUser

Description:

Method	Return values	Description
<b>getRolesByUser(String user)</b>	List<String>	Returns the list of all the roles assigned to a user.

Example:

```

using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservices ws = OKMWebservicesFactory.newInstance(host, username, pass);

            try
            {
                foreach(String role in ws.getRolesByUser("okmAdmin"))
                {
                    System.Console.WriteLine(role);
                }
            } catch (Exception e) {
                System.Console.WriteLine(e.ToString());
            }
        }
    }
}

```

## getUsers

Description:

Method	Return values	Description
--------	---------------	-------------

<b>getUsers()</b>	<b>List&lt;String&gt;</b>	Return the list of all the users.
-------------------	---------------------------	-----------------------------------

Example:

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, pass);

            try
            {
                foreach (String user in ws.getUsers())
                {
                    System.Console.WriteLine(user);
                }
            }
            catch (Exception e)
            {
                System.Console.WriteLine(e.ToString());
            }
        }
    }
}
```

### getUsersByRole

Description:

Method	Return values	Description
<b>getUsersByRole(String role)</b>	<b>List&lt;String&gt;</b>	Returns the list of all the users who have assigned a role.

Example:

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;

namespace OKMRest
{
    public class Program
```

```

{
    static void Main(string[] args)
    {
        String host = "http://localhost:8080/OpenKM";
        String username = "okmAdmin";
        String password = "admin";
        OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, pass);

        try
        {
            foreach (String user in ws.getUsersByRole("ROLE_ADMIN"))
            {
                System.Console.WriteLine(user);
            }
        }
        catch (Exception e)
        {
            System.Console.WriteLine(e.ToString());
        }
    }
}

```

## revokeRole

Description:

Method	Return values	Description
<b>revokeRole(String nodeId, String role, int permissions, boolean recursive)</b>	<b>void</b>	Removes the role grant on a node.

The parameter recursive only has sense when the nodeId is a folder or record node.

When parameter recursive is true, the change will be applied to the node and descendants.

Example:

```

using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;
using com.openkm.sdk4csharp.bean;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8180/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, pass);

```

```

        try
        {
            // Remove ROLE_USER write grants at the node but not descendants
            ws.revokeRole("/okm:root", "ROLE_USER", Permission.ALL_GRANTS, false)

            // Remove all ROLE_ADMIN grants to the node and descendants
            ws.revokeRole("/okm:root", "ROLE_ADMIN", Permission.ALL_GRANTS, true)
        }
        catch (Exception e)
        {
            System.Console.WriteLine(e.ToString());
        }
    }
}

```

## revokeUser

Description:

Method	Return values	Description
<b>revokeUser(String nodeId, String user, int permissions, boolean recursive)</b>	<b>void</b>	Removes the user grant on a node.

The parameter recursive only has sense when the nodeId is a folder or record node.

When parameter recursive is true, the change will be applied to the node and descendants.

Example:

```

using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, pass);

            try
            {
                // Remove john write grants at the node but not descendants
                ws.revokeUser("/okm:root", "john", Permission.ALL_GRANTS, false);

                // Remove all okmAdmin grants at the node and descendants

```

```
        ws.revokeUser("/okm:root", "okmAdmin", Permission.ALL_GRANTS, true);
    } catch (Exception e) {
        System.Console.WriteLine(e.ToString());
    }
}
```

### **grantRole**

### Description:

Method	Return values	Description
<code>grantRole(String nodeId, String role, int permissions, boolean recursive)</code>	<code>void</code>	Adds role grant on a node.

The parameter recursive only has sense when the nodeId is a folder or record node.

When parameter recursive is true, the change will be applied to the node and descendants.

Example:

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, pass

            try
            {
                // Add ROLE_USER write grants at the node but not descendants
                ws.grantRole("/okm:root", "ROLE_USER", Permission.ALL_GRANTS, false);

                // Add all ROLE_ADMIN grants to the node and descendants
                ws.grantRole("/okm:root", "ROLE_ADMIN", Permission.ALL_GRANTS, true);
            } catch (Exception e) {
                System.Console.WriteLine(e.ToString());
            }
        }
    }
}
```

**grantUser**

Description:

Method	Return values	Description
<b>grantUser(String nodeId, String user, int permissions, boolean recursive)</b>	<b>void</b>	Adds a user grant on a node.

The parameter recursive only has sense when the nodeId is a folder or record node.

When parameter recursive is true, the change will be applied to the node and descendants.

Example:

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, password);

            try
            {
                // Add john write grants at the node but not descendants
                ws.grantUser("/okm:root", "john", Permission.ALL_GRANTS, false);

                // Add all okmAdmin grants at the node and descendants
                ws.grantUser("/okm:root", "okmAdmin", Permission.ALL_GRANTS, true);
            } catch (Exception e)
            {
                System.Console.WriteLine(e.ToString());
            }
        }
    }
}
```

## Document samples

### Basics

On most methods you'll see parameter named "**docId**". The value of this parameter can be some valid document **UUID** or **path**.



Example of docId:

- Using UUID -> "f123a950-0329-4d62-8328-0ff500fd42db";
- Using path -> "/okm:root/logo.png"

### Methods

#### **createDocumentSimple**

Description:

Method	Return values	Description
<b>createDocumentSimple(String docPath, FileStream fs)</b>	<b>Document</b>	Creates a new document and returns as a result an object Document with the properties of the created document.

Example:

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;
using com.openkm.sdk4csharp.bean;
using System.IO;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, pass);

            try
            {
                FileStream fileStream = new FileStream("E:\\logo.png", FileMode.Open);
                ws.createDocumentSimple("/okm:root/logo.png", fileStream);
                fileStream.Dispose();
            } catch (Exception e)
            {
                System.Console.WriteLine(e.ToString());
            }
        }
    }
}
```

```

        }
    }
}

```

## deleteDocument

Description:

Method	Return values	Description
<b>deleteDocument(String docId)</b>	<b>void</b>	Deletes a document.

**i** When a document is deleted, it is automatically moved to /okm:trash/userId folder.

Example:

```

using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, pass);

            try
            {
                ws.deleteDocument("/okm:root/logo.png");
            } catch (Exception e)
            {
                System.Console.WriteLine(e.ToString());
            }

            System.Console.ReadKey();
        }
    }
}

```

## getDocumentProperties

Description:

Method	Return values	Description
<b>getDocumentProperties(String docId)</b>	<b>Document</b>	Returns the document properties.

Example:

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, pass);

            try
            {
                System.Console.WriteLine(ws.getDocumentProperties("/okm:root/logo.png"));
            } catch (Exception e)
            {
                System.Console.WriteLine(e.ToString());
            }
        }
    }
}
```

## getContent

Description:

Method	Return values	Description
<b>getContent(String docId)</b>	<b>Stream</b>	Retrieves a document content - binary data - of the actual document vers



In case you sent the file across a Servlet response we suggest set the content length with:

```
Document doc = ws.getDocumentProperties("/okm:root/logo.png");
response.setContentLength(new Long(doc.getActualVersion().getSize()).intValue());
```



We've found wrong size problems while using:

```
response.setContentLength(is.available());
```

Example:

```

using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;
using System.IO;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, pass);

            try
            {
                Stream st = ws.getContent("/okm:root/logo.png");
            } catch (Exception e)
            {
                System.Console.WriteLine(e.ToString());
            }
        }
    }
}

```

## getContentByVersion

Description:

Method	Return values	Description
<b>getContentByVersion(String docId, String versionId)</b>	<b>Stream</b>	Retrieves document content ( binary data ) of some specific version.



In case you sent the file across a Servlet response we suggest set the content lenght with:

```
Document doc = ws.getDocumentProperties("/okm:root/logo.png");
response.setContentLength(new Long(doc.getActualVersion().getFileSize()).intValue());
```



We've found wrong size problems while using:

```
response.setContentLength(is.available());
```

Example:

```

using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;
using System.IO;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, pass);

            try
            {
                Stream st = ws.getContentByVersion("/okm:root/logo.png","1.1");
            } catch (Exception e) {
                System.Console.WriteLine(e.ToString());
            }
        }
    }
}

```

## getDocumentChildren

Description:

Method	Return values	Description
<b>getDocumentChildren(String fldId)</b>	<b>List&lt;Document&gt;</b>	Returns a list of all documents which their parent is fldId.

The parameter fldId can be a folder or a record node.

Example:

```

using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;
using com.openkm.sdk4csharp.bean;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, pass);

```

```

        try
        {
            foreach (Document doc in ws.getDocumentChildren("/okm:root"))
            {
                System.Console.WriteLine(doc);
            }
        } catch (Exception e)
        {
            System.Console.WriteLine(e.ToString());
        }
    }
}

```

**renameDocument**

Description:

Method	Return values	Description
<b>renameDocument(String docId, String newName)</b>	<b>document</b>	Changes the name of a document.

Example:

```

using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;
using com.openkm.sdk4csharp.bean;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, password);

            try
            {
                Document doc = ws.renameDocument("f123a950-0329-4d62-8328-0ff500fd42");
            } catch (Exception e)
            {
                System.Console.WriteLine(e.ToString());
            }
        }
    }
}

```

**setProperties**

Description:

Method	Return values	Description

<b>setProperties(Document doc)</b>	<b>void</b>	Changes some document properties.
------------------------------------	-------------	-----------------------------------

Variables allowed to be changed:

- Title
- Description
- Language
- Associated categories
- Associated keywords



Only not null and not empty variables will be taken on consideration.

Example:

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;
using com.openkm.sdk4csharp.bean;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, pass);

            try
            {
                Document doc = ws.getDocumentProperties("f123a950-0329-4d62-8328-0ff5");
                doc.description = "some description";
                doc.keywords.Add("test");
                ws.setProperties(doc);
            } catch (Exception e)
            {
                System.Console.WriteLine(e.ToString());
            }
        }
    }
}
```

## checkout

Description:

Method	Return values	Description

<b>checkout(String docId)</b>	<b>void</b>	Marks the document for edition.
Only one user can modify a document at the same time.		
Before starting edition you must do a checkout action that lock the edition process for other users and allows only to the user who has executed the action.		

Example:

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, password);

            try
            {
                ws.checkout("/okm:root/logo.png");
                // At this point the document is locked for other users except for the user who has checked it out.
            } catch (Exception e)
            {
                System.Console.WriteLine(e.ToString());
            }
        }
    }
}
```

## cancelCheckout

Description:

Method	Return values	Description
<b>cancelCheckout(String docId)</b>	<b>void</b>	Cancels a document edition.
 This action can only be done by the user who previously executed the checkout action.		

Example:

```

using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, pass);

            try
            {
                // At this point the document is locked for other users except for the user who checked it out
                ws.cancelCheckout("/okm:root/logo.png");
                // At this point other users are allowed to execute a checkout and modify the document
            } catch (Exception e)
            {
                System.Console.WriteLine(e.ToString());
            }
        }
    }
}

```

## forceCancelCheckout

Description:

Method	Return values	Description
<b>forceCancelCheckout(String docId)</b>	<b>void</b>	Cancels a document edition.

This method allows to cancel edition on any document.

It is not mandatory to execute this action by the same user who previously executed the checkout action.



This action can only be done by a super user ( user with ROLE\_ADMIN ).

Example:

```

using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;

namespace OKMRest
{
    public class Program

```

```

    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, password);

            try
            {
                // At this point the document is locked for other users except for the user who checked it out
                ws.forceCancelCheckout("/okm:root/logo.png");
                // At this point other users are allowed to execute a checkout and modify the document
            } catch (Exception e) {
                System.Console.WriteLine(e.ToString());
            }
        }
    }
}

```

## isCheckedOut

Description:

Method	Return values	Description
<b>isCheckedOut(String docId)</b>	<b>Boolean</b>	Returns a boolean that indicate if the document is on edition or not.

Example:

```

using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, password);

            try
            {
                System.Console.WriteLine("Is the document checkout:" + ws.isCheckedOut("/okm:root/logo.png"));
            } catch (Exception e) {
                System.Console.WriteLine(e.ToString());
            }
        }
    }
}

```

## checkin

Description:

Method	Return values	Description
	Version	
<b>checkin(String docId, String comment, FileStream fs)</b>		Updates a document with new version and return an object with new Version values.



Only the user who started the edition - checkout - is allowed to update the document.

Example:

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using System.IO;
using com.openkm.sdk4csharp;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, pass);

            try
            {
                FileStream fs = new FileStream("E:\\logo.png", FileMode.Open);
                ws.checkin("/okm:root/logo.png","optional some comment",fs);
                fs.Dispose();
            } catch (Exception e)
            {
                System.Console.WriteLine(e.ToString());
            }
        }
    }
}
```

## getDocumentVersionHistory

Description:

Method	Return values	Description
<b>getDocumentVersionHistory(String docId)</b>	List<Version>	Return a list of all document versions.

Example:

```

using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;
using com.openkm.sdk4csharp.bean;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, pass);

            try
            {
                foreach (Version version in ws.getVersionHistory("/okm:root/logo.png"))
                {
                    System.Console.WriteLine(version);
                }
            } catch (Exception e)
            {
                System.Console.WriteLine(e.ToString());
            }
        }
    }
}

```

## lock

Description:

Method	Return values	Description
<b>lock(String docId)</b>	<b>LockInfo</b>	Locks a document and return an object with the Lock information.



Only the user who locked the document is allowed to unlock.

A locked document can not be modified by other users.

Example:

```

using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;
using com.openkm.sdk4csharp.bean;

namespace OKMRest
{
    public class Program
    {

```

```

        static void Main(string[] args)
    {
        String host = "http://localhost:8080/OpenKM";
        String username = "okmAdmin";
        String password = "admin";
        OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, password);

        try
        {
            ws.lockDocument("/okm:root/logo.png");
        } catch (Exception e) {
            System.Console.WriteLine(e.ToString());
        }
    }
}

```

## unlock

Description:

Method	Return values	Description
<b>unlock(String docId)</b>	<b>void</b>	Unlock a locked document.

**⚠️** Only the user who locked the document is allowed to unlock.

Example:

```

using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, password);

            try
            {
                ws.unlock("/okm:root/logo.png");
            } catch (Exception e) {
                System.Console.WriteLine(e.ToString());
            }
        }
    }
}

```

## forceUnlock

Description:

Method	Return values	Description
<b>forceUnlock(String docId)</b>	<b>void</b>	Unlocks a locked document.

This method allows to unlock any locked document.  
It is not mandatory execute this action by the same user who previously executed the checkout lock action.

**⚠️** This action can only be done by a super user ( user with ROLE\_ADMIN ).

Example:

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, pass);

            try
            {
                ws.forceUnlock("/okm:root/logo.png");
            } catch (Exception e)
            {
                System.Console.WriteLine(e.ToString());
            }
        }
    }
}
```

## isLocked

Description:

Method	Return values	Description
<b>isLocked(String docId)</b>	<b>Boolean</b>	Returns a boolean that indicate if the document is locked or not.

Example:

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, pass);

            try
            {
                System.Console.WriteLine("Is document locked:" + ws.isLocked("/okm:root/logo.png"));
            } catch (Exception e)
            {
                System.Console.WriteLine(e.ToString());
            }
        }
    }
}
```

## getLockInfo

Description:

Method	Return values	Description
<b>getLockInfo(String docId)</b>	<b>LockInfo</b>	Returns an object with the Lock information

Example:

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, pass);

            try
            {
                System.Console.WriteLine(ws.getLockInfo("/okm:root/logo.png"));
            }
        }
    }
}
```

```
        } catch (Exception e) {
            System.Console.WriteLine(e.ToString());
        }
    }
}
```

### **purgeDocument**

### Description:

Method	Return values	Description
<b>purgeDocument(String docId)</b>	<b>void</b>	Document is definitely removed from repository.

Usually you will purge documents into /okm:trash/userId - the personal trash user locations - but is possible to directly purge any document from the whole repository.



When a document is purged only will be able to be restored from a previously repository backup. The purge action remove the document definitely from the repository.

Example:

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, pass);

            try
            {
                ws.purgeDocument("/okm:trash/okmAdmin/logo.png");
            } catch (Exception e) {
                System.Console.WriteLine(e.ToString());
            }
        }
    }
}
```

### **moveDocument**

#### Description:

Method	Return values	Description
<b>moveDocument(String docId, String dstId)</b>	<b>void</b>	Moves a document into some folder or record.  The values of the dstId parameter should be a folder or record UUID or path.

Example:

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, pass);

            try
            {
                ws.moveDocument("/okm:root/logo.png", "/okm:root/test");
            } catch (Exception e)
            {
                System.Console.WriteLine(e.ToString());
            }
        }
    }
}
```

## copyDocument

Description:

Method	Return values	Description
<b>copyDocument(String docId, String dstId)</b>	<b>void</b>	Copies a document into some folder or record.

The values of the dstId parameter should be a folder or record UUID or path.

When parameter newName value is null, document will preserve the same name.



Only the binary data and the security grants are copied to destination, the metadata, keywords, etc. of the document are not copied.

See "**extendedDocumentCopy**" method for this feature.

Example:

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, password);

            try
            {
                ws.copyDocument("/okm:root/logo.png", "/okm:root/temp");
            } catch (Exception e)
            {
                System.Console.WriteLine(e.ToString());
            }
        }
    }
}
```

### **restoreVersion**

Description:

Method	Return values	Description
<b>restoreVersion(String docId, String versionId)</b>	<b>void</b>	Promotes a previous document version to actual version.

Example:

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, password);
        }
    }
}
```

```

        try
        {
            // Actual version is 2.0
            ws.restoreVersion("/okm:root/logo.png", "1.0");
            // Actual version is 1.0
        } catch (Exception e)
        {
            System.Console.WriteLine(e.ToString());
        }
    }
}

```

## **purgeVersionHistory**

Description:

Method	Return values	Description
<b>purgeVersionHistory(String docId)</b>	<b>void</b>	Purges all documents version except the actual version.

This action compact the version history of a document.



This action can not be reverted.

Example:

```

using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservices ws = OKMWebservicesFactory.newInstance(host, username, pass);

            try
            {
                // Version history has version 1.3,1.2,1.1 and 1.0
                ws.purgeVersionHistory("/okm:root/logo.png");
                // Version history has only version 1.3
            } catch (Exception e)
            {
                System.Console.WriteLine(e.ToString());
            }
        }
    }
}

```

**getVersionHistorySize**

Description:

Method	Return values	Description
<b>getVersionHistorySize(String docId)</b>	<b>long</b>	Returns the sum in bytes of all documents into documents history.

Example:

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, password);

            try
            {
                String[] UNITS = new String[] { "B", "KB", "MB", "GB", "TB", "PB", "EB" };
                long bytes = ws.getVersionHistorySize("/okm:root/logo.png");
                String value = "";

                for (int i = 6; i > 0; i--)
                {
                    double step = Math.Pow(1024, i);
                    if (bytes > step)
                        value = String.Format(Locale.ROOT, "%3.1f %s", bytes / step, UNITS[i - 1]);
                }

                if (value.Equals(""))
                {
                    value = bytes.ToString() + " " + UNITS[0];
                }

                System.Console.WriteLine(value);
            } catch (Exception e)
            {
                System.Console.WriteLine(e.ToString());
            }
        }
    }
}
```

**isLocked**

Description:

Method	Return values	Description
<b>isValidDocument(String docId)</b>	<b>Boolean</b>	Returns a boolean that indicate if the node is a document or not.

Example:

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, pass);

            try
            {
                // Return true
                ws.isValidDocument("/okm:root/logo.png");

                // Return false
                ws.isValidDocument("/okm:root");
            } catch (Exception e)
            {
                System.Console.WriteLine(e.ToString());
            }
        }
    }
}
```

### getDocumentPath

Description:

Method	Return values	Description
<b>getDocumentPath(String uuid)</b>	<b>String</b>	Converts a document UUID to document path.

Example:

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;
```

```
namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, password);

            try
            {
                System.Console.WriteLine(ws.getDocumentPath("e339f14b-4d3a-489c-91d3-1"));
            } catch (Exception e)
            {
                System.Console.WriteLine(e.ToString());
            }
        }
    }
}
```

## Folder samples

### Basics

On almost methods you'll see parameter named "**fldId**". The value of this parameter can be some valid folder **UUID** or **path**.



Example of fldId:

- Using UUID -> "f123a950-0329-4d62-8328-0ff500fd42db";
- Using path -> "/okm:root/test"

### Methods

#### createFolder

Description:

Method	Return values	Description
<b>createFolder(Folder fld)</b>	<b>Folder</b>	Creates a new folder and returns as a result an object Folder.

The variable **path** into the parameter **fld**, must be initialized. It indicates the folder path into OpenKM.

```
Folder fld = new Folder();
fld.path = "/okm:root/test";
```



The other variables of Folder ( fld ) will not take any effect on folder creation.

We suggest using the method below create FolderSimple rather this one.

Example:

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;
using com.openkm.sdk4csharp.bean;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";

```

```

        String password = "admin";
        OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, pass);

        try
        {
            Folder fld = new Folder();
            fld.path = "/okm:root/test";
            ws.createFolder(fld);
        } catch (Exception e)
        {
            System.Console.WriteLine(e.ToString());
        }
    }
}

```

### **createFolderSimple**

Description:

Method	Return values	Description
<b>createFolderSimple(String fldPath)</b>	<b>Folder</b>	Creates a new folder and returns as a result an object Folder.

Example:

```

using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;
using com.openkm.sdk4csharp.bean;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, pass);

            try
            {
                ws.createFolderSimple("/okm:root/test");
            } catch (Exception e)
            {
                System.Console.WriteLine(e.ToString());
            }
        }
    }
}

```

### **getFolderProperties**

Description:

Method	Return values	Description
--------	---------------	-------------

<b>getFolderProperties(String fldId)</b>	<b>Folder</b>	Returns the folder properties.
--	---------------	--------------------------------

Example:

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;
using com.openkm.sdk4csharp.bean;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, password);

            try
            {
                System.Console.WriteLine(ws.getFolderProperties("/okm:root/test"));
            } catch (Exception e)
            {
                System.Console.WriteLine(e.ToString());
            }
        }
    }
}
```

## deleteFolder

Description:

Method	Return values	Description
<b>deleteFolder(String fldId)</b>	<b>void</b>	Deletes a folder.

Example:

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
```

```

        String username = "okmAdmin";
        String password = "admin";
        OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, pass);

        try
        {
            ws.deleteFolder("/okm:root/test");
        } catch (Exception e) {
            System.Console.WriteLine(e.ToString());
        }
    }
}
}

```

### **renameFolder**

Description:

Method	Return values	Description
<b>renameFolder(String fldId, String newName)</b>	<b>Folder</b>	Renames a folder.

Example:

```

using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;
using com.openkm.sdk4csharp.bean;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, pass);

            try
            {
                // Exists folder /okm:root/test
                ws.renameFolder("/okm:root/test", "renamedFolder");
                // Folder has renamed to /okm:root/renamedFolder
            } catch (Exception e)
            {
                System.Console.WriteLine(e.ToString());
            }
        }
    }
}

```

### **moveFolder**

Description:

Method	Return values	Description
<b>moveFolder(String fldId, String dstId)</b>	<b>void</b>	Moves a folder into a folder or record.

The values of the dstId parameter should be a folder or record UUID or path.

Example:

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, pass);

            try
            {
                // Exists folder /okm:root/test
                ws.moveFolder("/okm:root/test", "/okm:root/tmp");
                // Folder has moved to /okm:root/tmp/test
            } catch (Exception e)
            {
                System.Console.WriteLine(e.ToString());
            }
        }
    }
}
```

## getFolderChildren

Description:

Method	Return values	Description
<b>getFolderChildren(String fldId)</b>	<b>List&lt;Folder&gt;</b>	Returns a list of all folder which their parent is fldId.

The parameter fldId can be a folder or a record node.

Example:

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;
```

```

using com.openkm.sdk4csharp.bean;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, pass);

            try
            {
                foreach (Folder fld in ws.getFolderChildren("/okm:root"))
                {
                    System.Console.WriteLine(fld);
                }
            }
            catch (Exception e)
            {
                System.Console.WriteLine(e.ToString());
            }
        }
    }
}

```

## isValidFolder

Description:

Method	Return values	Description
<b>isValidFolder(String fldId)</b>	<b>Boolean</b>	Returns a boolean that indicates if the node is a folder or not.

Example:

```

using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, pass);

            try
            {
                // Return false
                ws.isValidFolder("/okm:root/logo.png");
            }
        }
    }
}

```

```
        // Return true
        ws.isValidFolder("/okm:root");
    } catch (Exception e) {
        System.Console.WriteLine(e.ToString());
    }
}
}
```

### **getFolderPath**

### Description:

Method	Return values	Description
<b>getFolderPath(String uuid)</b>	<b>String</b>	Converts a folder UUID to folder path.

Example:

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, password);

            try
            {
                System.Console.WriteLine(ws.getFolderPath("f123a950-0329-4d62-8328-0f"));
            } catch (Exception e) {
                System.Console.WriteLine(e.ToString());
            }
        }
    }
}
```

## Note samples

### Basics

On most methods you'll see parameter named "**nodeId**". The value of this parameter can be a valid document, folder or record **UUID** or **path**.



Example of nodeId:

- Using UUID -> "**f123a950-0329-4d62-8328-0ff500fd42db**";
- Using path -> "**/okm:root/logo.png**"

### Methods

#### addNote

Description:

Method	Return values	Description
<b>addNote(String nodeId, String text)</b>	<b>Note</b>	Adds a note to a node and returns an object Note.

Example:

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, pass);

            try
            {
                ws.addNote("/okm:root/logo.png", "the note text");
            }
            catch (Exception e)
            {
                System.Console.WriteLine(e.ToString());
            }
        }
    }
}
```

**getNote**

Description:

Method	Return values	Description
<b>getNote(String noteId)</b>	<b>Note</b>	Retrieves the note.

**i** The noteId is an UUID.  
The object Note has a variable named path, in that case the path contains an UUID.

Example:

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;
using com.openkm.sdk4csharp.bean;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservices ws = OKMWebservicesFactory.newInstance(host, username, pass);

            try
            {
                List<Note> notes = ws.listNotes("/okm:root/logo.png");
                if (notes.Count > 0)
                {
                    System.Console.WriteLine(ws.getNote(notes[0].path));
                }
            }
            catch (Exception e)
            {
                System.Console.WriteLine(e.ToString());
            }
        }
    }
}
```

**deleteNote**

Description:

Method	Return values	Description

<b>deleteNote(String noteId)</b>	<b>Note</b>	Deletes a note.
<p><b>i</b> The noteId is an UUID. The object Note has a variable named path, in that case the path contains an UUID.</p>		

Example:

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;
using com.openkm.sdk4csharp.bean;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, password);

            try
            {
                List<Note> notes = ws.listNotes("/okm:root/logo.png");
                if (notes.Count > 0)
                {
                    System.Console.WriteLine(ws.deleteNote(notes[0].path));
                }
            }
            catch (Exception e)
            {
                System.Console.WriteLine(e.ToString());
            }
        }
    }
}
```

## setNote

Description:

Method	Return values	Description
<b>setNote(String noteId, String text)</b>	<b>void</b>	Changes the note text.
<p><b>i</b> The noteId is an UUID. The object Note have a variable named path, in that case the path contains an UUID.</p>		

Example:

```

using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;
using com.openkm.sdk4csharp.bean;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, pass);

            try
            {
                List<Note> notes = ws.listNotes("/okm:root/logo.png");
                if (notes.Count > 0)
                {
                    ws.setNote(notes[0].path, "text modified");
                }
            }
            catch (Exception e)
            {
                System.Console.WriteLine(e.ToString());
            }
        }
    }
}

```

## listNotes

Description:

Method	Return values	Description
<b>listNotes(String nodeId)</b>	<b>List&lt;Note&gt;</b>	Retrieves a list of all notes of a node.

Example:

```

using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;
using com.openkm.sdk4csharp.bean;

namespace OKMRest
{
    public class Program

```

```
{  
    static void Main(string[] args)  
    {  
        String host = "http://localhost:8080/OpenKM";  
        String username = "okmAdmin";  
        String password = "admin";  
        OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, password);  
  
        try  
        {  
            List<Note> notes = ws.listNotes("/okm:root/logo.png");  
            foreach (Note note in notes)  
            {  
                System.Console.WriteLine(note);  
            }  
        }  
        catch (Exception e)  
        {  
            System.Console.WriteLine(e.ToString());  
        }  
    }  
}
```

## Property samples

### Basics

On almost methods you'll see parameter named "**nodeId**". The value of this parameter can be a valid document, folder, mail or record **UUID** or **path**.



Example of nodeId:

- Using UUID -> "**f123a950-0329-4d62-8328-0ff500fd42db**";
- Using path -> "**/okm:root/logo.png**"

### Methods

#### **addCategory**

Description:

Method	Return values	Description
<b>addCategory(String nodeId, String catId)</b>	<b>void</b>	Sets a relation between a category and a node.

The value of the catId parameter should be a category folder UUID or path.

Example:

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, pass);

            try
            {
                ws.addCategory("/okm:root/logo.png", "/okm:categories/test");
            }
            catch (Exception e)
            {
                System.Console.WriteLine(e.ToString());
            }
        }
    }
}
```

```

        }
    }
}
```

## removeCategory

Description:

Method	Return values	Description
<b>removeCategory(String nodeId, String catId)</b>	<b>void</b>	Removes a relation between a category and a node.

The value of the catId parameter should be a category folder UUID or path.

Example:

```

using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, pass);

            try
            {
                ws.removeCategory("/okm:root/logo.png", "/okm:categories/test");
            }
            catch (Exception e)
            {
                System.Console.WriteLine(e.ToString());
            }
        }
    }
}
```

## addKeyword

Description:

Method	Return values	Description
<b>addKeyword(String nodeId, String keyword)</b>	<b>void</b>	Adds a keyword and a node.

The keyword should be a single word without spaces, formats allowed:

- "test"
- "two\_words" ( the character "\_" is used for the junction ).



Also we suggest you to add keyword in lower case format, because OpenKM is case sensitive.

Example:

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservices ws = OKMWebservicesFactory.newInstance(host, username, pass);

            try
            {
                ws.addKeyword("/okm:root/logo.png", "test");
            }
            catch (Exception e)
            {
                System.Console.WriteLine(e.ToString());
            }
        }
    }
}
```

## **removeKeyword**

Description:

Method	Return values	Description
<b>removeKeyword(String nodeId, String keyword)</b>	<b>void</b>	Removes a keyword from a node.

Example:

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
```

```

using com.openkm.sdk4csharp;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, pass);

            try
            {
                ws.removeKeyword("/okm:root/logo.png", "test");
            }
            catch (Exception e)
            {
                System.Console.WriteLine(e.ToString());
            }
        }
    }
}

```

## setEncryption

Description:

Method	Return values	Description
<b>setEncryption(String nodeId, String cipherName)</b>	<b>void</b>	Marks a document as an encrypted binary data into the repository

The parameter nodeId should be a document node.

The parameter cipherName saves information about the encryption mechanism.



This method does not perform any kind of encryption, simply mark into the database that a document is encrypted.

Example:

```

using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;

namespace OKMRest
{
    public class Program
    {

```

```

        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, password);

            try
            {
                ws.setEncryption("/okm:root/logo.png", "phrase");
            }
            catch (Exception e)
            {
                System.Console.WriteLine(e.ToString());
            }
        }
    }
}

```

## unsetEncryption

Description:

Method	Return values	Description
<b>unsetEncryption(String nodeId)</b>	<b>void</b>	Marks a document as a normal binary data into repository.

The parameter nodeId should be a document node.



This method does not perform any kind of uncryption, simply marks into the database that a document has been uncrypted.

Example:

```

using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, password);

            try
            {
                ws.unsetEncryption("/okm:root/logo.png");
            }
            catch (Exception e)
            {

```

```
        {
            System.Console.WriteLine(e.ToString());
        }
    }
}
```

## **setSigned**

### Description:

Method	Return values	Description
<b>setSigned(String nodeId, boolean signed)</b>	<b>void</b>	Marks a document as signed or unsigned binary data into the repository

The parameter nodeId should be a document node.



This method does not perform any kind of digital signature process, simply marks into the database that a document is signed.

Example:

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, password);

            try
            {
                ws.setSigned("/okm:root/logo.pdf", true);
            }
            catch (Exception e)
            {
                System.Console.WriteLine(e.ToString());
            }
        }
    }
}
```

## PropertyGroup samples

### Basics



From an older OpenKM version we named "**Metadata Groups**" as "**Property Groups**".

Although we understand this name does not help a lot to identifying these methods with metadata ones, for historical reason, we continue maintaining the nomenclature.

For more information about [Metadata](#).

On almost methods you'll see parameter named "**nodeId**". The value of this parameter can be a valid document, folder, mail or record **UUID** or **path**.



Example of nodeId:

- Using UUID -> "**f123a950-0329-4d62-8328-0ff500fd42db**";
- Using path -> "**/okm:root/logo.png**"



The class `com.openkm.sdk4j.util.ISO8601` should be used to set and parse metadata date fields. The metadata field of type date values are stored into application in ISO-8601 basic format.

To convert retrieved metadata field of type date to a valid date use:

```
DateTime date = ISO8601.parseBasic(metadataFieldValue);
```

To save date value into metadata field of type date use:

```
DateTime date = DateTime.now; // Present date
String metadataFieldValue = ISO8601.formatBasic(date);
// metadataFieldValue can be saved into repository metadata field of type dat
```

### Methods

#### **addGroup**

Description:

Method	Return values	Description
<b>addGroup(String nodeId, String grpName)</b>	<b>void</b>	Adds an empty metadata group to a node.

The grpName should be a valid Metadata group name.

Example:

```

using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, password);

            try
            {
                ws.addGroup("/okm:root/logo.png", "okg:consulting");
            }
            catch (Exception e)
            {
                System.Console.WriteLine(e.ToString());
            }
        }
    }
}

```

## **removeGroup**

Description:

Method	Return values	Description
<b>removeGroup(String nodeId, String grpName)</b>	<b>void</b>	Removes a metadata group of a node.

The grpName should be a valid Metadata group name.

Example:

```

using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";

```

```
        String username = "okmAdmin";
        String password = "admin";
        OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, pass);

        try
        {
            ws.removeGroup("/okm:root/logo.png", "okg:consulting");
        }
        catch (Exception e)
        {
            System.Console.WriteLine(e.ToString());
        }
    }

}
```

### **getGroups**

#### Description:

Method	Return values	Description
<b>getGroups(String nodeId)</b>	<b>List&lt;PropertyGroup&gt;</b>	Retrieves a list of metadata groups assigned to a node.

Example:

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;
using com.openkm.sdk4csharp.bean;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, password);

            try
            {
                foreach (PropertyGroup pGroup in ws.getGroups("/okm:root/logo.png"))
                {
                    System.Console.WriteLine(pGroup);
                }
            }
            catch (Exception e)
            {
                System.Console.WriteLine(e.ToString());
            }
        }
    }
}
```

**getAllGroups**

Description:

Method	Return values	Description
<b>getAllGroups()</b>	<b>List&lt;PropertyGroup&gt;</b>	Retrieves a list of all metadata groups set into the application.

Example:

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;
using com.openkm.sdk4csharp.bean;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, password);

            try
            {
                foreach (PropertyGroup pGroup in ws.getAllGroups())
                {
                    System.Console.WriteLine(pGroup);
                }
            }
            catch (Exception e)
            {
                System.Console.WriteLine(e.ToString());
            }
        }
    }
}
```

**getPropertyGroupProperties**

Description:

Method	Return values	Description
<b>getPropertyGroupProperties(String nodeId, String grpName)</b>	<b>List&lt;FormElement&gt;</b>	Retrieves a list of all metadata group elements and its values of a node.

The grpName should be a valid Metadata group name.



The method is usually used to display form elements with its values to be shown or changed by used.

Example:

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;
using com.openkm.sdk4csharp.bean;
using com.openkm.sdk4csharp.bean.form;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservices ws = OKMWebservicesFactory.newInstance(host, username, pass);

            try
            {
                foreach(FormElement fElement in ws.getPropertyGroupProperties("/okm:root"))
                {
                    System.Console.WriteLine(fElement);
                }
            }
            catch (Exception e)
            {
                System.Console.WriteLine(e.ToString());
            }
        }
    }
}
```

## getPropertyGroupForm

Description:

Method	Return values	Description
<b>getPropertyGroupForm(String grpName)</b>	<b>List&lt;FormElement&gt;</b>	Retrieves a list of all metadata group elements definition.

The grpName should be a valid Metadata group name.



The method is usually used to display empty form elements for creating new metadata values.

Example:

```

using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;
using com.openkm.sdk4csharp.bean;
using com.openkm.sdk4csharp.bean.form;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, pass);

            try
            {
                foreach (FormElement fElement in ws.getPropertyGroupForm("okg:consult"))
                {
                    System.Console.WriteLine(fElement);
                }
            }
            catch (Exception e)
            {
                System.Console.WriteLine(e.ToString());
            }
        }
    }
}

```

### setPropertyGroupProperties

Description:

Method	Return values	Description
<b>setPropertyGroupProperties(String nodeId, String grpName, List&lt;FormElement&gt; ofeList)</b>	<b>void</b>	Changes the metadata node.

The grpName should be a valid Metadata group name.



Is not mandatory set into parameter ofeList all FormElement, is enought with the formElements you wish to change



The sample below is based on this Metadata group definition:

```
<?xml version="1.0" encoding="UTF-8"?>
<!DOCTYPE property-groups PUBLIC "-//OpenKM//DTD Property Groups 2.0//EN"
```

```
"http://www.openkm.com/dtd/property-groups">
<property-groups>
    <property-group label="Consulting" name="okg:consulting">
        <input label="Name" type="text" name="okp:consulting.name"/>
        <input label="Date" type="date" name="okp:consulting.date" />
        <checkbox label="Important" name="okp:consulting.important"/>
        <textarea label="Comment" name="okp:consulting.comment"/>
    </property-group>
</property-groups>
```

### Example:

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;
using com.openkm.sdk4csharp.bean;
using com.openkm.sdk4csharp.util;
using com.openkm.sdk4csharp.bean.form;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8180/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, password);

            try
            {
                // Modify with a full FormElement list
                List<FormElement> fElements = ws.getPropertyGroupProperties("/okm:root/logo.pdf");
                foreach (FormElement fElement in fElements)
                {
                    if (fElement.name.Equals("okp:consulting.name"))
                    {
                        Input name = (Input) fElement;
                        name.value = "new value";
                    }
                }

                ws.setPropertyGroupProperties("/okm:root/logo.pdf", "okg:consulting", fElements);

                // Same modification with only affected FormElement
                fElements = new List<FormElement>();
                Input n = new Input();
                n.name = "okp:consulting.name";
                n.value = "new value";
                fElements.Add(n);
                ws.setPropertyGroupProperties("/okm:root/logo.pdf", "okg:consulting", fElements);
            }
            catch (Exception e)
            {
                System.Console.WriteLine(e.ToString());
            }
        }
    }
}
```

## setPropertyGroupPropertiesSimple

Description:

### Method

**setPropertyGroupPropertiesSimple(String nodeId, String grpName, Dictionary<String, String> properties)**

The grpName should be a valid Metadata group name.



Is not mandatory set into properties parameter all fields values, is enough with the fields you wish to change its value.



The sample below is based on this Metadata group definition:

```
<?xml version="1.0" encoding="UTF-8"?>
<!DOCTYPE property-groups PUBLIC "-//OpenKM//DTD Property Groups 2.0//EN"
 "http://www.openkm.com/dtd/property-groups">
<property-groups>
  <property-group label="Consulting" name="okg:consulting">
    <input label="Name" type="text" name="okp:consulting.name"/>
    <input label="Date" type="date" name="okp:consulting.date" />
    <checkbox label="Important" name="okp:consulting.important"/>
    <textarea label="Comment" name="okp:consulting.comment"/>
  </property-group>
</property-groups>
```



To add several values on a metadata field of type multiple like this:

```
<select label="Multiple" name="okp:consulting.multiple" type="multiple">
  <option label="One" value="one"/>
  <option label="Two" value="two"/>
  <option label="Three" value="three" />
</select>
```

You should do:

```
properties.Add("okp:consulting.multiple", "one;two");
```

Where "one" and "two" are valid values and character ";" is used as separator.

Example:

```
using System;
using System.Collections.Generic;
using System.Linq;
```

```

using System.Text;
using com.openkm.sdk4csharp;
using com.openkm.sdk4csharp.bean;
using com.openkm.sdk4csharp.util;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8180/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservices ws = OKMWebservicesFactory.newInstance(host, username, pass);

            try
            {
                Dictionary<String, String> properties = new Dictionary<String, String>();
                properties.Add("okp:consulting.name", "new name");

                //The date fields must be saved with basic ISO 8601 format
                properties.Add("okp:consulting.date", ISO8601.formatBasic(DateTime.Now));
                ws.setPropertyGroupPropertiesSimple("/okm:root/logo.pdf", "okg:consulting", properties);
            }
            catch (Exception e)
            {
                System.Console.WriteLine(e.ToString());
            }
        }
    }
}

```

## hasGroup

Description:

Method	Return values	Description
<b>hasGroup(String nodeId, String grpName)</b>	<b>Boolean</b>	Return a boolean that indicate if the node has or not a metadata group.

Example:

```

using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";

```

```
String password = "admin";
OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, password);

try
{
    System.Console.WriteLine("Have metadata group:" + ws.hasGroup("/okm:root"));
}
catch (Exception e)
{
    System.Console.WriteLine(e.ToString());
}

}
```

## Repository samples

### Methods

#### getRootFolder

Description:

Method	Return values	Description
<b>getRootFolder()</b>	<b>Folder</b>	Returns the object Folder of node "/okm:root"

Example:

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;
using com.openkm.sdk4csharp.bean;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservices ws = OKMWebservicesFactory.newInstance(host, username, pass);

            try
            {
                System.Console.WriteLine(ws.getRootFolder());
            }
            catch (Exception e)
            {
                System.Console.WriteLine(e.ToString());
            }
        }
    }
}
```

#### getTrashFolder

Description:

Method	Return values	Description
<b>getTrashFolder()</b>	<b>Folder</b>	Returns the object Folder of node "/okm:trash/{userId}"

The returned folder will be the user trash folder.



For example if the method is executed by "okmAdmin" user then the folder returned will be "/okm:trash/okmAdmin".

Example:

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, password);

            try
            {
                System.Console.WriteLine(ws.getTrashFolder());
            }
            catch (Exception e)
            {
                System.Console.WriteLine(e.ToString());
            }
        }
    }
}
```

## getTemplatesFolder

Description:

Method	Return values	Description
<b>getTemplatesFolder()</b>	<b>Folder</b>	Returns the object Folder of node "/okm:templates"

Example:

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;

namespace OKMRest
{
```

```

public class Program
{
    static void Main(string[] args)
    {
        String host = "http://localhost:8080/OpenKM";
        String username = "okmAdmin";
        String password = "admin";
        OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, password);

        try
        {
            System.Console.WriteLine(ws.getTemplatesFolder());
        }
        catch (Exception e)
        {
            System.Console.WriteLine(e.ToString());
        }
    }
}

```

## getPersonalFolder

Description:

Method	Return values	Description
<b>getPersonalFolder()</b>	<b>Folder</b>	Returns the object Folder of node "/okm:personal/{userId}"

The returned folder will be the user personal folder.



For example if the method is executed by "okmAdmin" user then the folder returned will be "/okm:personal/okmAdmin".

Example:

```

using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, password);

            try
            {
                System.Console.WriteLine(ws.getPersonalFolder());
            }

```

```

        }
        catch (Exception e)
        {
            System.Console.WriteLine(e.ToString());
        }
    }
}

```

## getMailFolder

Description:

Method	Return values	Description
<b>getMailFolder()</b>	<b>Folder</b>	Returns the object Folder of node "/okm:mail/{userId}"

The returned folder will be the user mail folder.



For example if the method is executed by "okmAdmin" user then the folder returned will be "/okm:mail/okmAdmin".

Example:

```

using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, pass);

            try
            {
                System.Console.WriteLine(ws.getMailFolder());
            }
            catch (Exception e)
            {
                System.Console.WriteLine(e.ToString());
            }
        }
    }
}

```

## getThesaurusFolder

Description:

Method	Return values	Description
<b>getThesaurusFolder()</b>	<b>Folder</b>	Returns the object Folder of node "/okm:thesaurus"

Example:

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, pass);

            try
            {
                System.Console.WriteLine(ws.getThesaurusFolder());
            }
            catch (Exception e)
            {
                System.Console.WriteLine(e.ToString());
            }
        }
    }
}
```

## getCategoriesFolder

Description:

Method	Return values	Description
<b>getCategoriesFolder()</b>	<b>Folder</b>	Returns the object Folder of node "/okm:categories"

Example:

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;

namespace OKMRest
{
```

```

public class Program
{
    static void Main(string[] args)
    {
        String host = "http://localhost:8080/OpenKM";
        String username = "okmAdmin";
        String password = "admin";
        OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, pass);

        try
        {
            System.Console.WriteLine(ws.getCategoriesFolder());
        }
        catch (Exception e)
        {
            System.Console.WriteLine(e.ToString());
        }
    }
}

```

## **purgeTrash**

Description:

Method	Return values	Description
<b>purgeTrash()</b>	<b>void</b>	Definitively removes from the repository all nodes into "/okm:trash/{userId}"

**i** For example if the method is executed by "okmAdmin" user then the purged trash will be "/okm:trash/okmAdmin".

**!** When a node is purged it will only be able to be restored from a previously repository backup. The purge action remove the node definitely from the repository.

Example:

```

using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, pass);

            try

```

```

        {
            ws.purgeTrash();
        }
        catch (Exception e)
        {
            System.Console.WriteLine(e.ToString());
        }
    }
}

```

## getUpdateMessage

Description:

Method	Return values	Description
<b>getUpdateMessage()</b>	<b>String</b>	Retrieves a message when a new OpenKM release is available.

There's an official OpenKM update message service available which is based on your local OpenKM version.



The most common message is that a new OpenKM version has been released.

Example:

```

using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8180/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservicesFactory ws = OKMWebservicesFactory.newInstance(host, username, pass);

            try
            {
                System.Console.WriteLine(ws.getUpdateMessage());
            }
            catch (Exception e)
            {
                System.Console.WriteLine(e.ToString());
            }
        }
    }
}

```

## getRepositoryUuid

Description:

Method	Return values	Description
<b>getRepositoryUuid()</b>	<b>String</b>	Retrieves a installation unique identifier.

Example:

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, pass);

            try
            {
                System.Console.WriteLine(ws.getRepositoryUuid());
            }
            catch (Exception e)
            {
                System.Console.WriteLine(e.ToString());
            }
        }
    }
}
```

## hasNode

Description:

Method	Return values	Description
<b>hasNode(String nodeId)</b>	<b>Boolean</b>	Returns a node that indicates if a node exists or not.

The value of the parameter nodeId can be a valid **UUID** or **path**.

Example:

```
using System;
using System.Collections.Generic;
```

```

using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservicesFactory ws = OKMWebservicesFactory.newInstance(host, username, pass);

            try
            {
                System.Console.WriteLine("Exists node:" + ws.hasNode("064ff51a-b815-4a2d-8f1e-1a2a2a2a2a2a"));
            }
            catch (Exception e)
            {
                System.Console.WriteLine(e.ToString());
            }
        }
    }
}

```

## getNodePath

Description:

Method	Return values	Description
<b>getNodePath(String uuid)</b>	<b>String</b>	Converts node UUID to path.

Example:

```

using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservicesFactory ws = OKMWebservicesFactory.newInstance(host, username, pass);

            try
            {
                System.Console.WriteLine(ws.getNodePath("e339f14b-4d3a-489c-91d3-05e"));
            }
            catch (Exception e)
            {

```

```
        System.Console.WriteLine(e.ToString());
    }
}
```

## **getNodeUuid**

### Description:

Method	Return values	Description
<b>getNodeUuid(String path)</b>	<b>String</b>	Converts a node path to UUID.

Example:

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, password);

            try
            {
                System.Console.WriteLine(ws.getNodeUuid("/okm:root/tmp"));
            }
            catch (Exception e)
            {
                System.Console.WriteLine(e.ToString());
            }
        }
    }
}
```

## getAppVersion

### Description:

Method	Return values	Description
<b>getAppVersion()</b>	<b>AppVersion</b>	Returns information about OpenKM version.

Example:

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, pass);

            try
            {
                System.Console.WriteLine(ws.getAppVersion());
            }
            catch (Exception e)
            {
                System.Console.WriteLine(e.ToString());
            }
        }
    }
}
```

## Search samples

### Basics

Most methods use QueryParams here there're some clues about how using it.

Variables	Type	Allow wildcards	
<b>domain</b>	<b>long</b>	No.	<p>Available values:</p> <ul style="list-style-type: none"> <li>• <code>queryParams.DOCUMENT</code></li> <li>• <code>queryParams.FOLDER</code></li> <li>• <code>queryParams.MAIL</code></li> </ul> <p>By default the value is set to <code>queryParams.DOCUMENT</code>.</p> <p>For searching documents and folders use value:</p> <div style="border: 1px dashed #ccc; padding: 5px; margin-top: 10px;"> <code>(queryParams.DOCUMENT   queryParams.FOLDER)</code> </div>
<b>author</b>	<b>String</b>	No.	Value must be a valid userId.
<b>name</b>	<b>String</b>	Yes.	
<b>keywords</b>	<b>List&lt;String&gt;</b>	Yes.	
<b>categories</b>	<b>List&lt;String&gt;</b>	No.	Values should be categories UUID, not use path value.
<b>content</b>		Yes.	

<b> mimeType</b>		No.	Value should be a valid and registered MIME type.  Only can be applied to documents node.
<b> path</b>		No.	When empty is used by default "/okm:root" node.
<b> lastModifiedFrom</b>	<b> Calendar</b>	No.	
<b> lastModifiedTo</b>	<b> Calendar</b>	No.	
<b> mailSubject</b>	<b> String</b>	Yes.	Only applies to mail nodes.
<b> mailFrom</b>	<b> String</b>	Yes.	Only applies to mail nodes.
<b> mailTo</b>		Yes.	Only applies to mail nodes.
<b> properties</b>	<b> Dictionary&lt;String, String&gt;</b>	Yes on almost.	On metadata field values like "date" can not be applied wilcards.  The dictionary of the properties is composed of pairs:  ('metadata_field_name','metada_field_value')

For example:

```
Dictionary<String, String> properties = ne
properties.Add("okp:consulting.name", "nam
```

### Filtering by range of dates:

```
DateTime date = DateTime.Now;// today
DateTime to = new DateTime(date.Year, dat
DateTime from = to.AddDays(-3); // three d
Dictionary<String, String> properties = ne
properties.Add("okp:consulting.date", ISO
```



When filtering by range of dates you must

### To filtering by a metadata field of type multiple

```
<select label="Multiple" name="okp:consult
<option label="One" value="one"/>
<option label="Two" value="two"/>
<option label="Three" value="three" />
</select>
```

You should do:

```
properties.Add("okp:consulting.multiple",
```

Where "one" and "two" are valid values and chara



The search operation is done only by AND logic.

Wildcard examples:

Variable	Example	Description
<b>name</b>	<b>test*.html</b>	Any document that starts with characters "test" and ends with characters ".html"
<b>name</b>	<b>test?.html</b>	Any document that starts with characters "test" followed by a single character and ends with characters ".html"

<b>name</b>	<b>?test*</b>	Any of the documents where the first character doesn't matter, but is followed by the characters, "test".
-------------	---------------	---

## Methods

### findByContent

Description:

Method	Return values	Description
<b>findByContent(String content)</b>	<b>List&lt;QueryResult&gt;</b>	Returns a list of results filtered by the value of the content parameter.

 The method only searches among all documents, it not takes in consideration any other kind of nodes.

Example:

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;
using com.openkm.sdk4csharp.bean;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, pass);

            try
            {
                foreach (QueryResult qr in ws.findByContent("test"))
                {
                    System.Console.WriteLine(qr);
                }
            }
            catch (Exception e)
            {
                System.Console.WriteLine(e.ToString());
            }
        }
    }
}
```

## findByName

Description:

Method	Return values	Description
<b>findByName(String name)</b>	<b>List&lt;QueryResult&gt;</b>	Returns a list of results filtered by the value of the name parameter.

 The method only searches among all documents, it not takes in consideration any other kind of nodes.

Example:

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;
using com.openkm.sdk4csharp.bean;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservices ws = OKMWebservicesFactory.newInstance(host, username, pass);

            try
            {
                foreach (QueryResult qr in ws.findByName("?test*"))
                {
                    System.Console.WriteLine(qr);
                }
            }
            catch (Exception e)
            {
                System.Console.WriteLine(e.ToString());
            }
        }
    }
}
```

## findByKeywords

Description:

Method	Return values	Description

<b>findByKeywords(List&lt;String&gt; keywords)</b>	<b>List&lt;QueryResult&gt;</b>	Returns a list of results filtered by the values of the keywords parameter.
 The method only searches among all documents, it does not takes in consideration any other kind of nodes.		

Example:

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;
using com.openkm.sdk4csharp.bean;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, password);

            try
            {
                List<string> keywords = new List<string>();
                keywords.Add("test");

                foreach (QueryResult qr in ws.findByKeywords(keywords))
                {
                    System.Console.WriteLine(qr);
                }
            }
            catch (Exception e)
            {
                System.Console.WriteLine(e.ToString());
            }
        }
    }
}
```

## find

Description:

Method	Return values	Description
<b>find(QueryParams queryParams)</b>	<b>List&lt;QueryResult&gt;</b>	Returns a list of results filtered by the values of the queryParams parameter.

Example:

```

using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;
using com.openkm.sdk4csharp.bean;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8180/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, pass);

            try
            {
                QueryParams qParams = new QueryParams();
                qParams.domain = QueryParams.DOCUMENT;
                qParams.name = "test*.html";

                foreach (QueryResult qr in ws.find(qParams))
                {
                    System.Console.WriteLine(qr);
                }
            }
            catch (Exception e)
            {
                System.Console.WriteLine(e.ToString());
            }
        }
    }
}

```

## findPaginated

Description:

Method	Return values	Description
<b>findPaginated(QueryParams queryParams, int offset, int limit)</b>	<b>ResultSet</b>	Returns a list of paginated results filtered by the values of the queryParams parameter.



The parameter "limit" and "offset" allow you to retrieve just a portion of the results of a query.

- The parameter "limit" is used to limit the number of results returned.
- The parameter "offset" says to skip that many results before the beginning to return results.



For example if your query have 1000 results, but you only want to return the first 10, you should use these values:

- limit=10
- offset=0

Now suppose you want to show the results from 11-20, you should use these values:

- limit=10
- offset=10

Example:

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;
using com.openkm.sdk4csharp.bean;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8180/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, pass);

            try
            {
                QueryParams qParams = new QueryParams();
                qParams.domain = QueryParams.DOCUMENT;
                qParams.name = "test*.html";
                ResultSet rs = ws.findPaginated(qParams, 20, 10);
                System.Console.WriteLine("Total results:" + rs.total);

                foreach (QueryResult qr in rs.results)
                {
                    System.Console.WriteLine(qr);
                }
            }
            catch (Exception e)
            {
                System.Console.WriteLine(e.ToString());
            }
        }
    }
}
```

### **findSimpleQueryPaginated**

Description:

Method	Return values	Description
<b>findSimpleQueryPaginated(String statement, int offset, int limit)</b>	<b>ResultSet</b>	Returns a list of paginated results filtered by the values of the statement parameter.



The **syntax** to use in the statement parameter is the pair '**field:value**'. For example:

- "name:grial" is filtering field name by word grial.

More information about Lucene sintaxis at [Lucene query syntax](#).



The parameter "limit" and "offset" allow you to retrieve just a portion of the results of a query.

- The parameter "limit" is used to limit the number of results returned.
- The parameter "offset" says to skip that many results before the beginning to return results.



For example if your query have 1000 results, but you only want to return the first 10, you should use these values:

- limit=10
- offset=0

Now suppose you want to show the results from 11-20, you should use these values:

- limit=10
- offset=10

Example:

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;
using com.openkm.sdk4csharp.bean;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, pass);
        }
    }
}
```

```
        try
        {
            ResultSet rs = ws.findSimpleQueryPaginated(20, 10, "name:grial");
            System.Console.WriteLine("Total results:" + rs.total);

            foreach (QueryResult qr in rs.results)
            {
                System.Console.WriteLine(qr);
            }
        }
        catch (Exception e)
        {
            System.Console.WriteLine(e.ToString());
        }
    }
}
```

### **findMoreLikeThis**

### Description:

Method	Return values	Description
<b>findMoreLikeThis(String uuid, int max)</b>	<b>ResultSet</b>	Returns a list of documents that are considered similar by search engine.

The `uqid` is a document UUID.

The max value is used to limit the number of results returned.



The method can only be used with documents.

Example:

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;
using com.openkm.sdk4csharp.bean;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, pass);
        }
    }
}
```

```
        try
        {
            ResultSet rs = ws.findMoreLikeThis("c5cb1982-1a99-4741-8a07-a319b9ac3
System.Console.WriteLine("Total results:" + rs.total);

            foreach (QueryResult qr in rs.results)
            {
                System.Console.WriteLine(qr);
            }
        }
        catch (Exception e)
        {
            System.Console.WriteLine(e.ToString());
        }
    }
}
```

### **getKeywordMap**

### Description:

Method	Return values	Description
<b>getKeywordMap(String[] filter)</b>	<b>Dictionary&lt;String, Integer&gt;</b>	Returns a map of keywords with its count value filtered by other keywords.



Example:

- Doc1.txt has keywords "test", "one", "two".
  - Doc2.txt has keywords "test", "one"
  - Doc3.txt has keywords "test", "three".

The results filtering by "test" -> "one", "two", "three".

The results filtering by "one" -> "test", "two".

The results filtering by "two" -> "test", "one".

The results filtering by "three" -> "test".

The results filtering by "one" and "two" .

Example:

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;
using com.openkm.sdk4csharp.bean;
```

```

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8080/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, password);

            try
            {
                // All keywords without filtering
                System.Console.WriteLine("Without filtering");
                Dictionary<String, int> keywords = ws.getKeywordMap(new String[]{"test"});

                foreach (KeyValuePair<string, int> kvp in keywords)
                {
                    System.Console.WriteLine(kvp.Key + " is used :" + kvp.Value);
                }

                // Keywords filtered
                System.Console.WriteLine("Filtering");
                keywords = ws.getKeywordMap(new String[]{"test"});

                foreach (KeyValuePair<string, int> kvp in keywords)
                {
                    System.Console.WriteLine(kvp.Key + " is used :" + kvp.Value);
                }
            }
            catch (Exception e)
            {
                System.Console.WriteLine(e.ToString());
            }
        }
    }
}

```

### getCategorizedDocuments

Description:

Method	Return values	Description
<b>getCategorizedDocuments(String categoryId)</b>	<b>List&lt;Document&gt;</b>	Retrieves a list of all documents related with a category.

The values of the categoryId parameter should be a category folder UUID or path.

Example:

```

using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using com.openkm.sdk4csharp;

```

```
using com.openkm.sdk4csharp.bean;

namespace OKMRest
{
    public class Program
    {
        static void Main(string[] args)
        {
            String host = "http://localhost:8180/OpenKM";
            String username = "okmAdmin";
            String password = "admin";
            OKMWebservice ws = OKMWebservicesFactory.newInstance(host, username, pass);

            try
            {
                foreach (Document doc in ws.getCategorizedDocuments("/okm:categories/"))
                {
                    System.Console.WriteLine(doc);
                }
            }
            catch (Exception e)
            {
                System.Console.WriteLine(e.ToString());
            }
        }
    }
}
```